

LTG Aktiengesellschaft

Industrial Air Diffusers Type LTB/ LTC



LTG Aktiengesellschaft

D - 70435 Stuttgart, Grenzstraße 7

☎ +49 (0711) 82 01-180 Fax +49 (0711) 82 01-720

Internet: <http://www.LTG-AG.de>

E-Mail: info@LTG-AG.de

LTG Incorporated

105 Corporate Drive, Suite E

Spartanburg S.C. 29303 USA

☎ (864) 599-6340 Fax (864) 599-6344

Internet: <http://www.LTG-INC.net>

E-Mail: info@LTG-INC.net

LTG S.r.l.

Via G. Leopardi 10

I-20066 Melzo

☎ 02 9 55 05 35 Fax 02 9 55 08 28

Internet: <http://www.LTG-SRL.com>

E-Mail: info@LTG-SRL.com

Components for Room Air Technology

Germany

Central Office (Frankfurt)

Sontraer Str. 27, D-60386 Frankfurt

☎ (069) 94 20 19-0, Fax -10

E-mail: Schilling@LTG-AG.de

Central Office (Herborn)

Sperberweg 16, D-35745 Herborn

☎ (02772) 570-725, Fax -727

E-mail: Hartmann@LTG-AG.de

Northern Office

Meessen 5, D-22113 Oststeinbek

☎ (040) 7 13 84 85, Fax 7 13 82 55

E-mail: Heinsch@LTG-AG.de

Eastern Office (Berlin)

Eisenhutweg 51a, D-12487 Berlin

☎ (030) 63 22 87-74, Fax -75

E-mail: Linke@LTG-AG.de

Eastern Office (Chemnitz)

Johannes-Ebert-Straße 20,

D-09128 Chemnitz

☎ (0371) 7711-801, Fax -802

E-mail: Schenfeld@LTG-AG.de

Southern Office

Grenzstraße 7, D-70435 Stuttgart

☎ (0711) 8201-180, Fax -720

E-mail: Gau@LTG-AG.de

Western Office

Demagstr. 47a, D-40597 Düsseldorf

☎ (0211) 71866-13, Fax -39

E-mail: Joswig@LTG-AG.de

Austria

KTG Klimatechnische Gesellschaft mbH

Autokaderstraße 31, A-1210 Wien

☎ (01) 2 70 25 90

Fax (01) 2 70 25 90 20

E-Mail: info@ktg-wien.com

France

INNTEK

18, Avenue Gabriel Péri

F-78360 Montesson

☎ (01) 30 15 16 16, Fax (01) 30 15 16 17

E-Mail: INNTEC.AC@wanadoo.fr

Great Britain

MAP

Motorised Air Products Ltd.

Unit 5A, Sopwith Crescent

Wickford Business Park Wickford

GB-Essex SS11 8YU

☎ (01268) 57 44 42, Fax (01268) 57 44 43

E-Mail: info@mapuk.com

Poland

HTK Went Sp.z.o.o.

ul. Chopina 13/3, Pl-30047 Krakow

☎ (012) 632 31 32, Fax (012) 632 81 93

E-Mail: info@htk-went.pl

Portugal

ArGelo S. A.

R. Luis Pastor de Macedo, Lote 28 B,

P-1750-158 Lisboa

☎ (21) 752 01 20, Fax (21) 752 01 29

E-Mail: info@argelo.pt

Slovenia

Energo Plus

Koprska 108 d

SLO- 1000 Ljubljana

☎ (01) 200 73 67, Fax (01) 42 33 346

E-Mail: info@energoplus.si

Turkey

Step Müh. Yapi Ltd.

Yali Yolu Sokak.

Turanli Apt. No: 24 D.1

TR- 81110 Bostanci-Istanbul

☎ (0216) 445 2931, Fax (0216) 445 2505

E-Mail: info@stepyapi.com.tr

Components for Process Air Technology

Japan

Toho Engineering Co. Ltd.

14-11, Shimizu 3-Chome, Kita Ku

Japan 462 Nagoya

☎ (052) 9 91-10 40, Fax (052) 9 14-98 22

E-Mail: main@tohoeng.com

The Program for Room Air Technology

Components

Air diffusers for walls, floors and ceilings · "LTG System clean[®]" · Coandatrol[®] and Coandavent[®] air diffusers · LTG cool wave[®] chilling fans · Klimavent[®] induction units · Raumluf[®] fan coil units · Facade fan coil units · Airflow control units · labair[®] system

Engineering services

Technical services for investors, architects, engineers and plant builders during design, construction and operation of buildings. Reliable and precise data relating to the ventilation of air conditioning system are given already before realization of the project, determined by measurements, calculations, building simulations and experiments.

The Program for Process Air Technology

Components

Axial-flow, centrifugal and tangential fans · Collector system for: coarse and fine particle filtration, separating and compacting, compressing and humidifying.

Engineering services

Technical services for construction engineers and plant designers during development and operation of assembly groups, machines and plants.

Industrial Air Diffusers Type LTB/ LTC

Application

Our industrial air diffusers, type LTB and LTC, have been specially designed for airconditioning industrial facilities with heavy heat and dust loads. These diffusers ensure a thorough and draftfree ventilation of the production areas.

The two types are identical in shape, but differ in the hole pattern of the air outlets, thus determining the actual air volume range.

LTB is for larger and LTC for smaller air quantities.

The diffuser can be connected directly to the supply air ducts or mounted below a dropped ceiling and connected to the duct with a sliding connection piece.

Functional Principle

The hole pattern of the air diffuser, optimized by air flow tests, divides the supply air into numerous individual jets.

These jets are then reduced locally in areas of mixed air, all along the range of the jets.

The jet width has been chosen in a way to ensure that the temperature and speed differentials are reduced close to zero when reaching the occupied zone without producing any areas of rising air due to induction.

Thus, the air jets provide a steady flow pattern, even with high specific loads.

Advantages

- High capacity of the air diffuser ensuring a high specific cooling capacity.
- Low air speed in the occupied zone.
- Excellent ventilation of the occupied zone.
- No raising or circulating of dust.
- Diffuser with dust protection.
- Reduction of dust level.



Air diffusers type LTB directly connected to the supply air duct, with lateral air injection.



Air diffusers type LTB installed below the dropped ceiling with the supply air ducts above


Industrial Air Diffusers Type LTB/ LTC

The Product Range

Diffuser type	Size	Volume flow rate [m ³ /h]	Installation height [m]	Temperature difference t _{ZU} - t _R [K]	Static duct pressure * [Pa]
LTB	900	1200 - 1800	4 - 6	-2 to -10	60 / 100
	1350	1800 - 2700			
	1800	2400 - 3600			
LTC	900	350 - 550	3 - 4	-2 to -10	20 / 40
	1350	500 - 800			
	1800	700 - 1100			

* A duct dimensioning program is available. The air speed inside the duct for type LTB is:

v_{LTBmax} = 10 m/s, for the type LTC: v_{LTCmax} = 8 m/s.

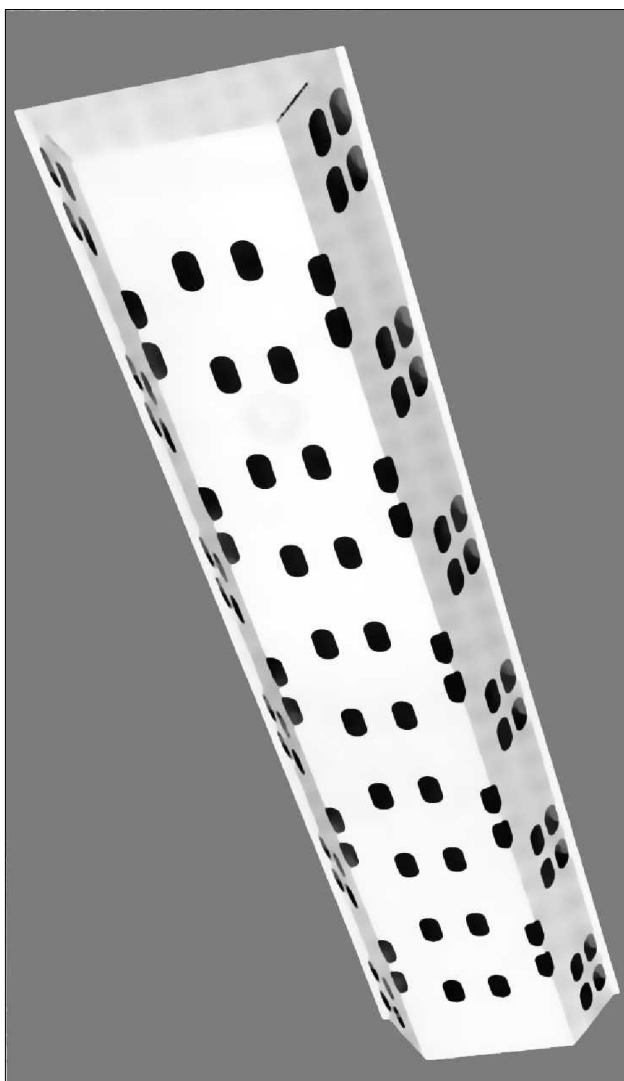

Diffuser Type LDB

Selection

There is an upper and a lower limit for the air volume per diffuser. The maximum admissible speed in the occupied zone sets the upper limit. And in order to ensure a steady air flow pattern and a correct distribution of the air inside the duct, the minimum values per diffuser must not be beyond those given in the selection diagram.

Example in the selection diagram

Air Volume:

1600 m³/h for the diffuser size 900 or
2400 m³/h for the diffuser size 1350 or
3200 m³/h for the diffuser size 1800

Installation height:

(floor to upper edge outlet)
= 5 m

Resulting in a

max. speed in the occupied zone

of 33 cm/s.

This is the maximum value. The medium speed is lower.

Resulting from the air volume and the installation height,

the duct distance (center / center duct)

is 7,5 m in order to still ensure a complete room ventilation.

Resulting from the diffuser size, the

standard duct length is


L_{standard duct length} = size (in mm) + 200 mm

Selection for type LTC can be made in a similar way.

Industrial Air Diffusers Type LTB/ LTC


Industrial air diffuser type LTB

Selection diagram for temperature differences of -2K to -10K

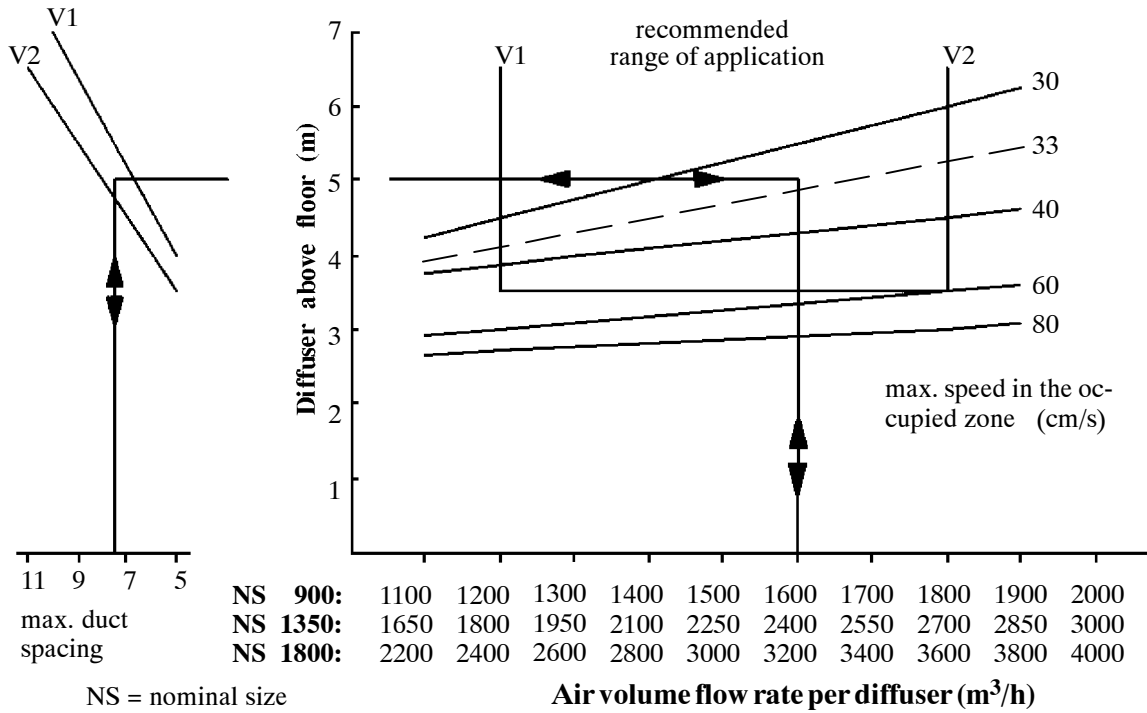

Industrial air diffuser type LTC

Selection diagram for temperature differences of -2K to -10K

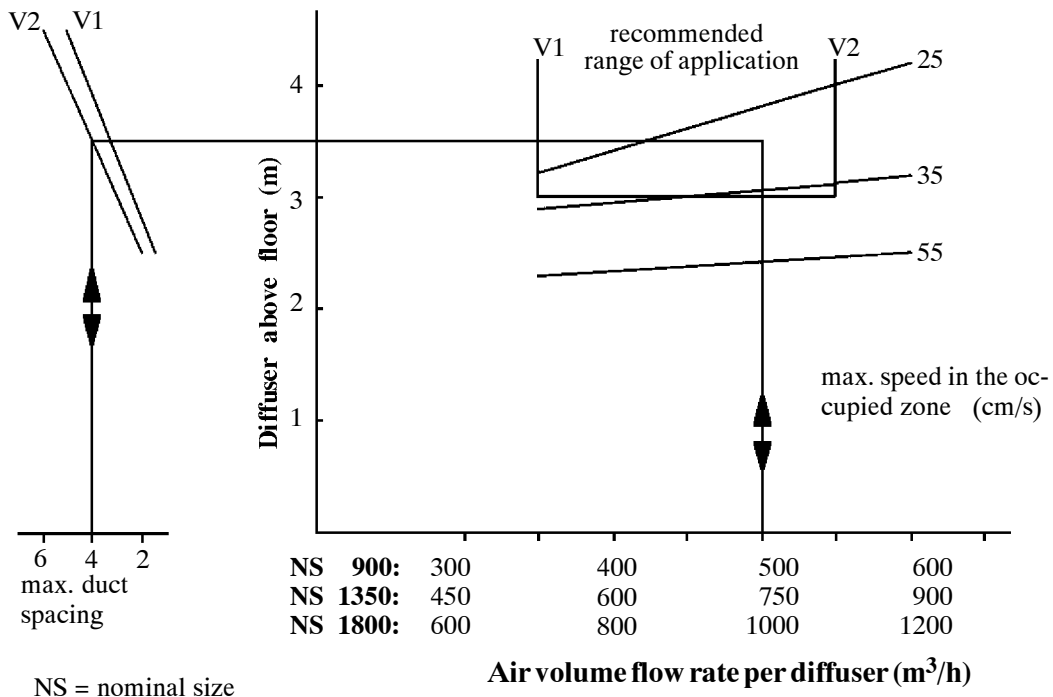

Industrial Air Diffusers Type LTB/ LTC


Installation example:

Direct connection to the duct

The delivery includes:

- Air outlet unit
- Deflector insert
- Suspension with safety loop

The duct with cutout and end cover is not included.

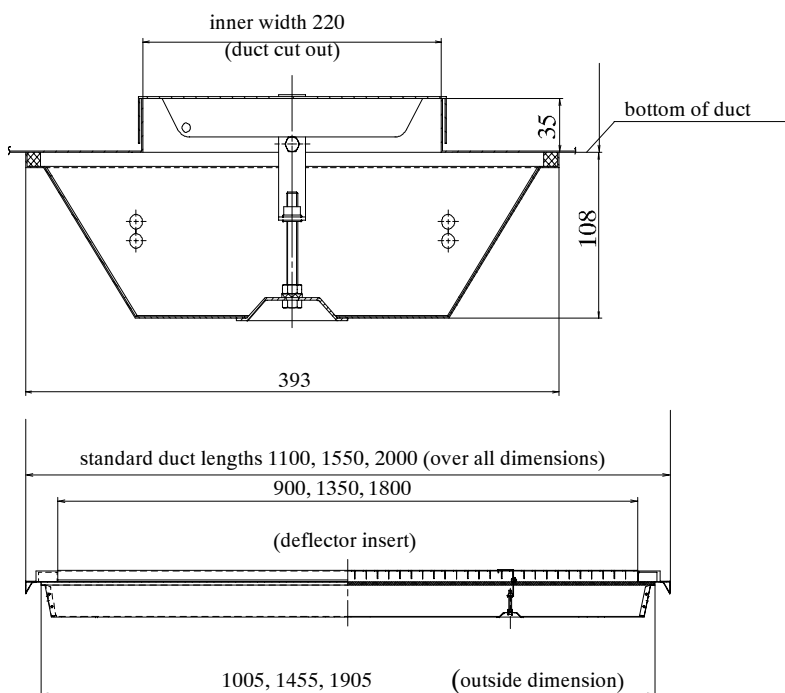

Installation example:

Installation below dropped ceilings, including adjustable connection piece

The delivery includes:

- Air outlet unit
- Deflector insert
- Suspension with safety loop
- Adjustable connection piece

The duct with cutout and end cover is not included.

The sliding connection piece comprises of two pieces:

- the lower part with the standard height of 130 mm
- the upper part with a standard height of 100 mm or 200 mm or 300 mm

Nominal height	Setting range
170 mm	130...210 mm
270 mm	230...310 mm
300 mm	330...410 mm

